

Power-Modulated Thermally Assisted Oxygen Plasma for Enhanced Reliability in $\text{TiO}_2/\text{TiO}_{2-x}$ Memristors

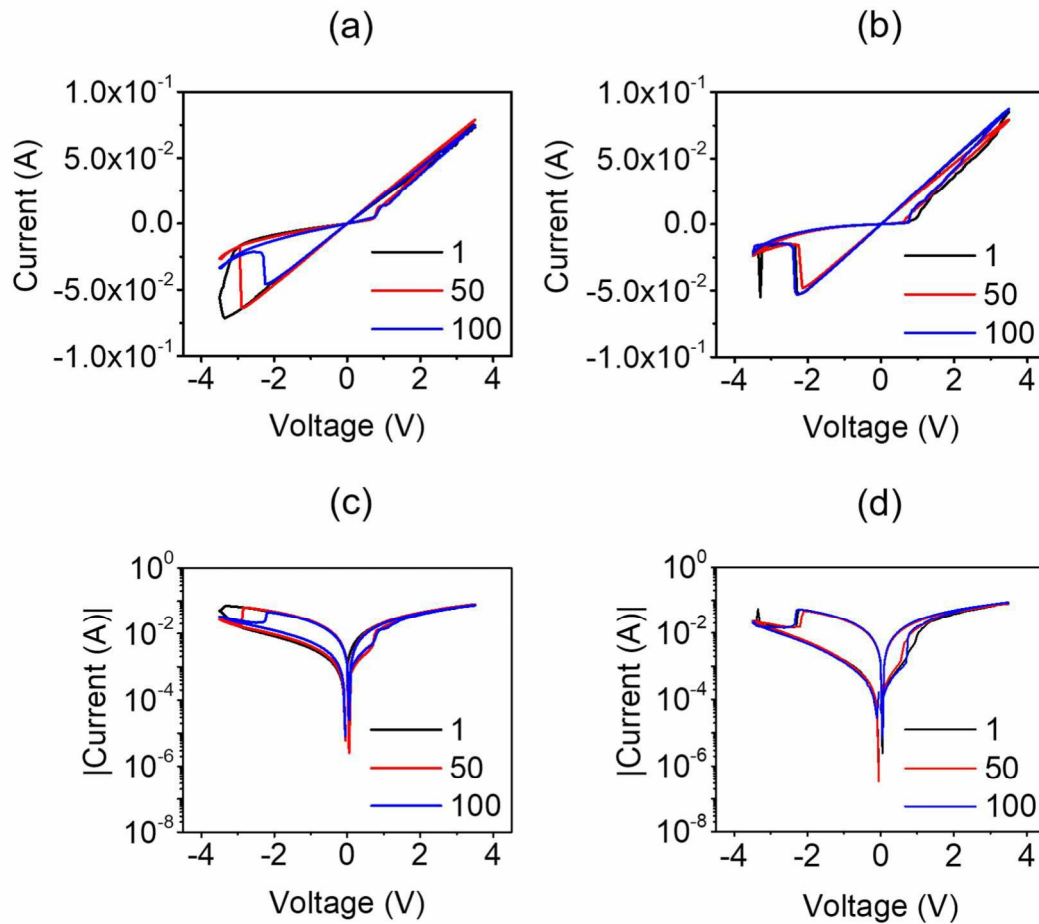


Fig. 1. 100 cycles I-V curves at (a) 40 W, (b) 80 W and log scale I-V curves of (c) 40 W and (d) 80 W after thermally assisted oxygen plasma process